FOR MYSORE STATE

-1-52.

Public (C.P.)

(1953.) Department.

Ms SERIES.

G.O. Ms NO. 1463

Dated 2-6-53.

Passed.
[illegible]
Superintendent.

G.O. at P 764.

[Despatch Abstract.]

Community projects - South Kanara Area - Communications - Construction of 2 major culverts and 19 minor culverts on the Nalur - Sarpadty road - Estimate - Sanctioned.

Back Papers.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.

Further Papers.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.
Lr. No. 3009 RDP(1)/54 (Public)			12/4/56				
Memo	13602 RDP(1) 55-4	Public	20-3-1956				

Rc/Emo. D51/53-23

4477 1

Office of the Project Executive Officer,
South Kanara, Mangalore, Dt. 4-3-53.

From

Sri G.Simhadri, B.A.,
Project Executive Officer,
Mangalore.

To

The Director of Community Projects
and Ex-Officio Secretary to Govt.,
Fort St.George, Madras 9.

.....

Sir,

IT SECRETARY
9 FEB 1953
PUBLIC DEPARTMENT

COMMUNITY PROJECTS - South Kanara District - Block II - Kanihalla - Maninalkur Road - Estimate - Sanction requested.

****

I submit herewith an estimate for two culverts and minor hume pipe culverts proposed to be constructed on the Navur Maninalkur road upto Sarpady. The distance of the road is four miles. The earth work costs Rs. 2,300/- The people through whose land the road passes, have surrendered their lands for the formation of the road and the value of the land surrendered comes to Rs. 2,000/- The cost of construction of the culverts is estimated to cost Rs. 14,700/-

Though this is in Block II, prior cooperation has been offered by the villagers and Project Advisory Committee at its meeting held on 22-12-52 approved this work. The Collector and the Director of Community Projects inspected this work on 4-2-1953 and 15-2-1953 respectively. This is an important road linking up a number of villages and helping the people who ~~bring to buy~~ Agricultural produces to the market by vehicles. The road has been formed for about a mile. At the time of the Director's visit, people from different villages gathered and represented the importance of this road being laid at an early date. The people are very eager to commence the work connected with the culverts and it will be appropriate if these works are commenced on 15th or 16th of this month when the Director, Community Projects Administration, New Delhi visits this District. I request that necessary sanction for the culverts may be accorded at a very early date.

PROJECT EXECUTIVE OFFICER.

Rc
4/2
Enclosure
Estimate
in duplicate.

Memo No. 1477 Pub(Cp. Audit)/53-1 dt. 20.3.53 Pub (Cp. audit) Dept

Sub- Community Projects- South Kanara Dt- Communications- Est. for Culverts Causeways from Naravi to Saipady.

Ref- From the P.E.O Mangalore Lr. C.No 751/53-B dt 4.3.53

The estimate received with the letter cited above, is herewith returned. The P.E.O Mangalore is requested to obtain the technical approval of the Dvl Engnrs (Highways) * to the working estimate for the two major culverts proposed for the road. The P.E.O may resubmit the estimate for the entire work for sanction after obtaining the technical approval to the two Sub works

Dr 13-3-53

S 20/3/53.

To the P.E.O Mangalore. (with enclosures).

(RP 3 works)

Exchange Rr 9.4.53 (R) 18.3.53

(N.A. 20.4.53)

9.4.53

9.4.53

5

Ref.C.No.751/53-B.

Project Executive Office, S.Kanara,
Mangalore, Dated 13-5-1953.

From

Sri G.Simhadri, B.A.,
Project Executive Officer,
Mangalore.

To

1136

The Di... and Ex... Fort S...

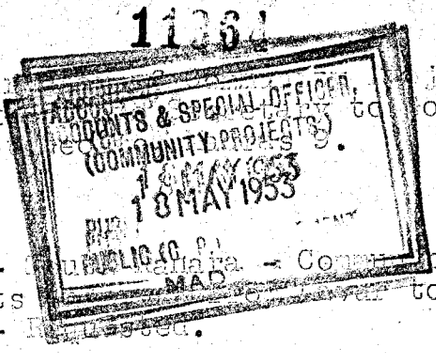

Sir,

Sub: Community Projects - ...ara - Communications
Estimate for culverts ... to
Sarpady - Sanction - R...

Ref: Govt.Memo.No. 4477 Pub.(C.P.Audit)/53-1
dated 20-3-53.

.....

The estimates for the two major culverts have been got technically scrutinized by the Divisional Engineer (Highways), Mangalore as directed in the Govt, Memo. cited. The estimated cost of the road with culverts is Rs. 17,000/- out of which Rs. 2,300/- is for the earth work and the balance for the culverts. The earth work will be done by the villagers in addition to gifting away land valued at Rs. 2,000/- The culverts costing Rs. 14,700/- have to be constructed at the cost of the Community Projects. I request that the estimates may be sanctioned for Rs. 14,700/- The work is in Block II.

PROJECT EXECUTIVE OFFICER.

Enclosure: Estimate in duplicate.

T/14.5.

Pub(CP. Audit) Dept.

(Cl No 4477/53)

G.O. Ms. 1463 dated 2-6-53

Abstract:- Community Projects - South Kanara Area Communications - Construction of 2 major culverts and 19 minor culverts on the Navur-Saipady road. - Estimate Sanctioned

Read:- From the PEO. Mangalore - cf Cl No 751/53-B dated 13-5-53

Orders:-

Sanction is accorded to an expenditure not exceeding Rs 14201/- (Rupees Fourteen Thousand two hundred and one only) for the construction of 2 major culverts and 19 pipe culverts on the Navur-Saipady road of length 3 miles and 3 furlongs in length, which is being formed by the people at their cost. This sanction is granted against the provision in item II H. of the Project estimates approved by the CP.A in their letter CPA 33/5/52 dated 31-3-53

2. The expenditure should be debited to "63B. Community Development Projects. II Community Projects. h. Communications - 4. works".

3. The PEO Mangalore should get the work executed according to the plans and estimate herewith returned approved and submit a Copy of the Completion report to Govt in due course

28.5.53

To
The PEO. Mangalore (with enclosures)
.. The A/G. (Madras)
Copy to the Secy. C.P.A. Rashtrapathi Bhavan, New Delhi
.. The Collector, South Kanara
.. The Sri A Balakrishnan BABL, IA&AS (AG. Madras)
.. Pub (CP. Roads) Dept
.. Pub (CP. Tech.) Dept
SF - Copies received for S.F.

Span.

2B. 6 months.

o/c of est. received

Pub (CP. Audit) Dept.

(C No. 4477/53) Sub- Community Projects- South Kanara district- Communications
Estimate for forming a road and 2 culverts on from Navoor to Saipady
Ref- From the P.E.O. Mangalore Ref. C No. 751/53-B. dt. 4-3-53

Please see the letter from the P.E.O. cited above, enclosing an estimate for forming the road and Construction of Culverts on the Navoor- Saipady road.

The road portion of the work is estimated at Rs 2300, excluding the cost of land required for widening the existing Cart track. The land will be gifted away by the owners.

The cost of 2 major culverts is estimated at Rs 10700 and that of the 19 pipe culverts is Rs 4000/-. The cost of these two groups of works will have to be met from CP. funds.

The two major culverts are of 15' Span and 19' Span respectively and will be of the R.C. Slab type. The thickness of slab adopted in each case is as specified in the Indian Roads Congress publications and approved by the High ways Dept. But the suitability and adequacy of the foundations and bank Connections and the selection of the actual location will have to be decided on verification at the site by Competent technical authority. The estimate may therefore be returned to the P.E.O for obtaining the technical Scrutiny of the divisional Engineer Highways. Only the estimates for the two major Culverts will be got thus Scrutinized, as otherwise the Centage charges (Rs 1000) for Scrutiny may Cover the total estimated Cost for the Scheme.

A draft memo is put up for approval

13-3-53

20/3/53

(Issued as memo No 4777 Pub (CP. Audit)/53-1 dt 20-3-53)

From the P.E.O. Mangalore. Ref C No 751/53-B dated 13-5-53

Please see the letter cited above from the P.E.O Mangalore at p 5 CF. The estimate is now resubmitted with the working estimates for the two major culverts Technically Approved by the D. E. (Highways).

The general abstract of the work totals to Rs 17,000 as Submitted by the P.E.O. This is made up of items listed

below

1. Earth work for forming road for 3m. 3 flgs.	Rs 2300
2. Construction of major culvert at 0/5+560 ft.	Rs 4200
3. Reconstruction of major culvert at 1/0+469'-	Rs 5900
4. Construction of 19 pipe culverts all along the road (12 of 1-0" diameter and 7 of 2-0" diameter)	Rs 4000
	Rs 16400/-
5 Centage at 1% for scrutiny of estimate	Rs 164/-
6. Unforeseen works if any.	Rs 436/
Total	17000/-

Sanction is required for (Rs 17000 - Rs 2300) ie for the Cost of Construction of the 21 culverts only.

But as pointed out at /A at p1 ante, only the working estimate for the 2 major culverts were required to be technically approved by the DE. (H). and the DE (H) has appended his signature in token of approval to these two working estimates only. As such the centage charges for scrutiny will be payable at 1% of the Cost of these two culverts only viz Rs 4200 + Rs 5900 or on Rs 10,100 - or equal to Rs 101. /A

Item 6 above is superfluous in view of the fact that an adequate sum has been added to the working estimate for items 1 to 4. Hence the estimates Cost may be taken as (items 1 to 4) Rs 16400 + Rs 101 (item 5. 1% of items 2+3) or Rs 16501/- of this the road work proper will be the people's share of the expenditure in addition to giving away of lands required for diversions on the roads, which is not exhibited in the estimate. Sanction may therefore be accorded to ~~Rs 16501~~ (Rs 16,501 - Rs 2300) or Rs 14,201/- The draft order sanctioning the expenditure may please be approved and the estimate also Countersigned (2) + (11)

Of the 50 culverts provided in the budget estimate, Sanction has so far been accorded to the Construction of 32 culverts at an expenditure of Rs. 21,200/- for Block I. But the present work is in Block II and may be sanctioned in view of the PEO's recommendation.

Notes in register of Sketches

28.5.53 This is one of the items of the works which I saw on the 28th May 1953. The road has been well

that inspite of opposition of some owners of the lands gifted away, they were forced to give their consent. The major Culvert is proposed to be constructed at a place which is the narrowest to reduce cost. Even the Dist. Engineer (H) actually inspected the spot before giving his consent. As reported people are impatient. At least the foundation will have to be laid before the monsoons. Sri Vaikunta Baliga MLA said that the work should first be started to appease complaints.

As regards Contage charges for Scrutiny, it is not clear whether the P.E.O. actually expended only the two estimates for the 2 culverts or the entire Estimate. However he may Sanction Rs 101/- as suggested by the Superintendent as at present 2 alone.

The estimates may be countersigned by D.C.P.

S
31/5/53

A.J.C. 1/6/53

1/6/53
DCP

[Issued as Ltr No. RS No. 1463 & Rubric (CP.) dt 2.6.53]